

Model: NT-IN10110

Spec: 1/5M/40

H.265 10CH 1HDD NVR




Features

- S+265 Compression
- Up to 5MP Resolution Recording
- Support 10-ch Intelligent Analysis Process
- Smart Search&Recording
- Support ANR Function
- Cloud upgrade,IPC Cloud upgrade
- Plug in free
- 1x HDMI, 1x VGA, Same Video Source, Max Resolution 1080p
- 1 SATA(Up to 10TB), 2x USB
- UI V3.0,Support free dragging of UI navigation bar

Video/Audio Input	
Video Input	10ch
Audio Input	N/A
Network	
Incoming Bandwidth	40Mbps
Outgoing Bandwidth	40Mbps
Mobile Software	P2P/IP for IOS&Android (App Name: Easylive)
Internet Protocol	TCP/UDP/HTTP/MULTICAST/UPnP/DHCP/DDNS/NTP/RTSP/SAD P Etc
Email	N/A
ANR	Y
Remote Connection	64
Browser	Support all browsers, including IE, Safari, Chrome, Edge. (H.265 only supports configuration in non-IE kernel browsers)
Advanced	Remaining Bandwidth Display
Video/Audio Output	
HDMI Output	1-ch, Resolution 1920x1080, 1280x720, 1440x900, 1366x768, 1280x800, 1024x768, 800x600

VGA Output	1-ch, Resolution 1920×1080, 1280×720, 1440×900, 1366×768, 1280×800, 1024×768, 800×600 Adjustable Output mode, Self-adaptive Resolution
Audio Output	N/A
Recording Resolution	5MP/4MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Synchronous Playback	2-ch 1080P/4-ch 720P
Display Split	1/3/4/6/8/9/10
Decoding	
Compression	S+265/H.265/H.264H/H.264M/H.264B
Preview Capability	2-ch 1080P/4-ch 720P
E-Zoom	Y
Hard Disk	
SATA	1 SATA for 1 HDD
eSATA	N/A
Capacity	Up to 10TB Capacity for Each HDD (0~45°C)
NTFS Files System	N/A
HDD Management	Group and Quota, Customized Recording Days
RAID	
RAID Mode	N/A
RAID Management	N/A
External Interface	
HDMI Output	1ch
VGA Output	1ch
POE	N/A
Network Interface	1 RJ-45 10/100 Self-adaptive Ethernet Interfaces
Serial Interface	N/A
USB Interface	2 x USB2.0
Alarm In/Out	N/A
Advance	
Video Analytics(VCA)	Camera VCA Function, including Tripwire/Double Tripwire/Perimeter/Object Abandon/Object Lost/Loitering/Running/Parking/Face Detection/Crowd/On duty Detection/Video Abnormal Detection/Audio Abnormal Detection/Video defocus diagnosis/Video scene transformation diagnosis
I-Frame Record	Y
Plug and Play	N/A
Image Flip	Y, Only for Private Protocol
Corridor Mode	Y, Only for Private Protocol

Smart Search	Quickly Search Target VCA Videos , Only for Private Protocol
Trigger Recording	Manual/Timing/Motion Detection/Port Alarm/ VCA Alarm/Video Lost
Smart Recording	Set Recording Bit Rate for Different Time
Alarm Recording	Pre Alarm Default 10s (5/10/15/60s Optional) , Post Alarm Default 10s (10/15/30/60/600s Optional).
One Key Control	Recording,one key add
Records Format	SDV, MP4
Records Encryption	Y
Records Tag	Y
Onvif	Onvif(Profile S)
General	
Language	English,Simplified Chinese
Power Supply	DC12V 3.33A
Consumption(without HDD)	≤ 10W
Working Temperature	-10 °C ~ +55 °C (+14 °F~ + 131 °F)
Working Humidity	10 % ~ 90 %
Chassis	1U
Dimensions	45mm×255mm×231mm
Weight	0.8KG (without HDD), 1.4KG (with Packing Box)

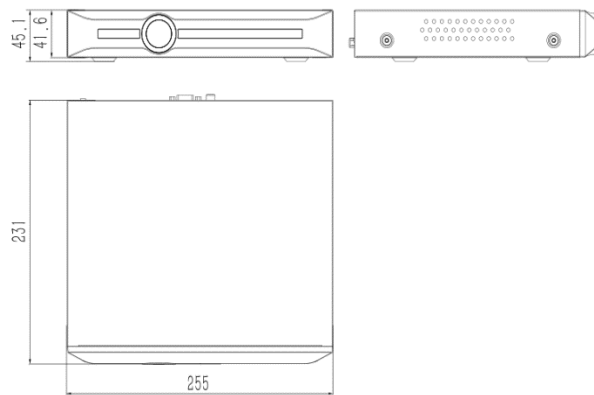

Product specification and design are subject to change without any prior notice.